

3/2-uzavírací ventil, mechanicky ovládaný, série 652


- $Q_n 1 \rightarrow 2 = 4300\text{--}11400 \text{ l/min}$

- $Q_n 2 \rightarrow 3 = 230 \text{ l/min}$



Ovládání
Provozní tlak min/max
Teplota okolí min./max.
Teplota média min./max.
Médium
Hmotnost

Mechanický
0 ... 16 bar
-10 ... 50 °C
-10 ... 50 °C
Stlačený vzduch Neutrální plyny
0,44 kg
Vyexpedovaný výrobek se od vyobrazení liší. Přesný popis viz výkres.

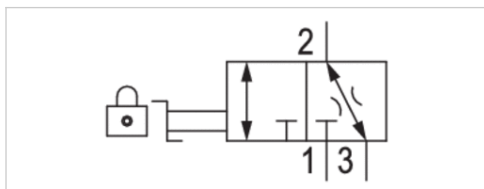

Technické údaje

Číslo materiálu	Přípoj stlačeného vzduchu Vstup	Přípoj	Průtok	Průtok	Materiál Tlumiče odfuku
			$Q_n 1 \rightarrow 2$	$Q_n 2 \rightarrow 3$	
G652A3M02011100	G 1/4	G 1/4	4300 l/min	230 l/min	Kov
G652A3M02011200	G 1/4	G 1/4	4300 l/min	230 l/min	Umělá hmota
G652A3M020A0000	G 1/4	G 1/4	4300 l/min	230 l/min	-
G652A3M03011100	G 3/8	G 3/8	8800 l/min	230 l/min	Kov
G652A3M03011200	G 3/8	G 3/8	8800 l/min	230 l/min	Umělá hmota
G652A3M030A0000	G 3/8	G 3/8	8800 l/min	230 l/min	-
G652A3M04011100	G 1/2	G 1/2	11400 l/min	230 l/min	Kov
G652A3M04011200	G 1/2	G 1/2	11400 l/min	230 l/min	Umělá hmota
G652A3M040A0000	G 1/2	G 1/2	11400 l/min	230 l/min	-


Jmenovitý průtok Q_n při 6.3 bar a $\Delta p = 1 \text{ bar}$

Technické informace

Materiál	
Pouzdro	Hliník
Těsnění	Nitril-butadien kaučuk

Rozmry

Rozmry

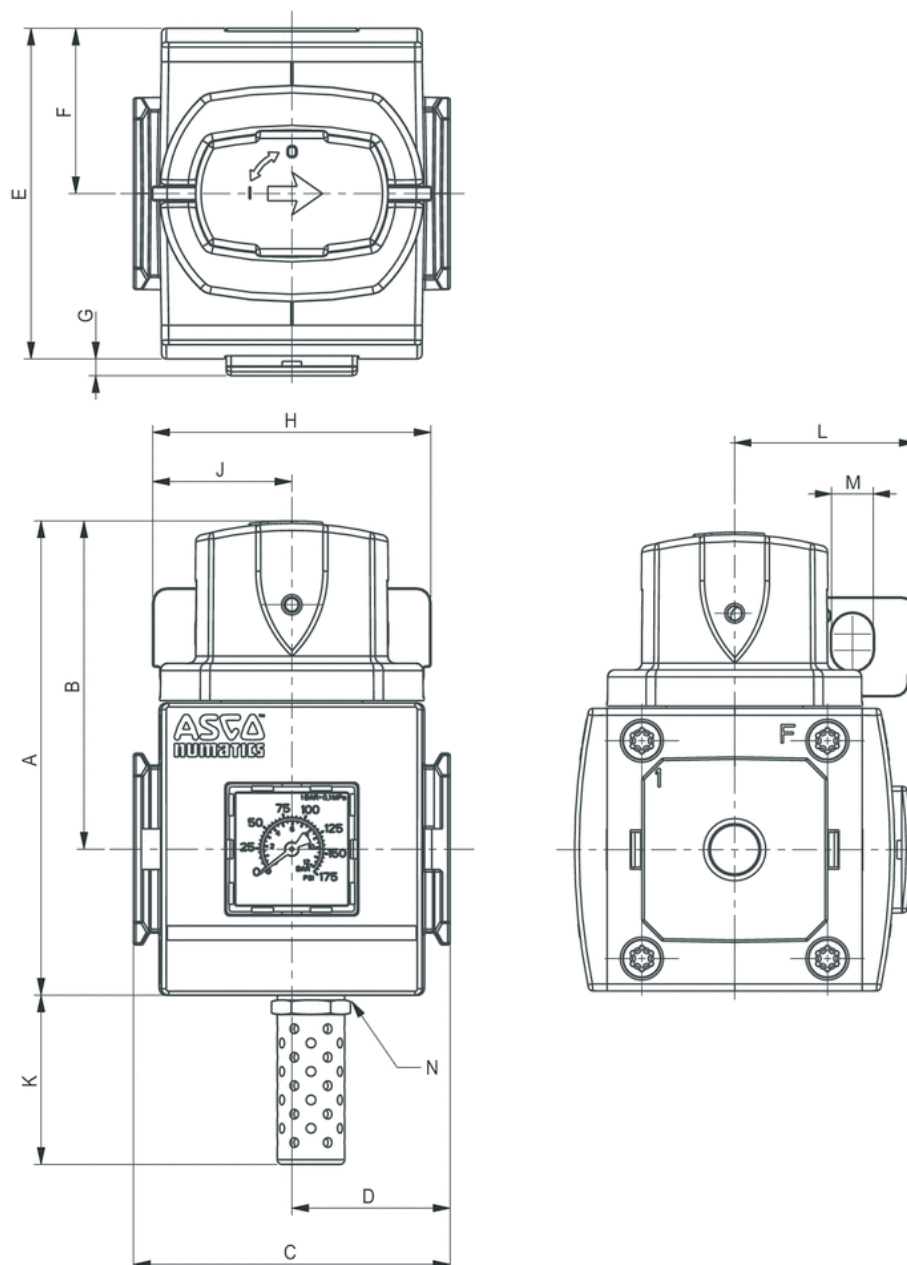


Rozmry

Série	A	B	C	D	E	F	G	H	J	K	L	M	N
652	99	68	66	33	69	34,5	2,5	58	29	35	39	9	G 1/4

Pehled pískušenství

Pehled pískušenství

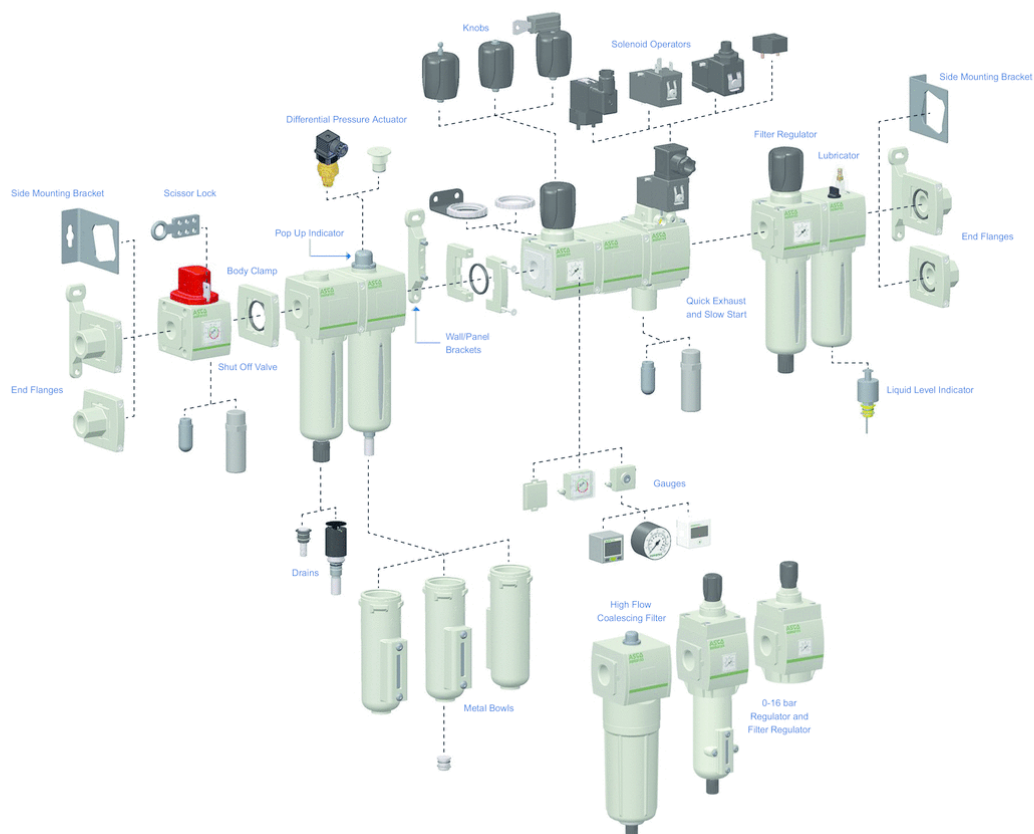

Upozornění pi objednávce

	G	651	A	3	M	0	2	G	A00	00
Thread connection										
G = ISO 228/1-G ⁽¹⁾										
8 = NPTF										
Product series										
651										
652										
653										
Revision letter										
A										
Product type										
2 = 2/2 - Shut Off Valve										
3 = 3/2 - Shut Off Valve										
Valve Type										
M = Manually Operated Ball Valve with Lockout										
Pilot valve /Electrical connection										
0 = No Electrical Connection										
Port size										
1 = 1/8 (651 Series)										
2 = 1/4 (651 or 652 Series)										
3 = 3/8 (652 Series)										
4 = 1/2 (652 Series)										
5 = 3/4 (653 Series)										
6 = 1 (653 Series)										

⁽¹⁾ Conforms to ISO standards 1179-1.

⁽²⁾ If multiple options are required, please use the on-line CAD configurator on the website to generate the part number (www.asco.com).

Options ⁽²⁾

- A00 = Without option
- 101 = Side Mounting Brackets
- 109 = FPM seals
- 111 = Metal Muffler
- 112 = Polyethylene Muffler
- 113 = Stainless steel fasteners
- 115 = Scissor Lock
- 117 = ATEX zones 1-21 
- 122 = Bottom oriented pressure adjustment
- 123 = Gauge type mounted for right-to-left flow
- 124 = CUTR Certification (EAC)
- 125 = CUTR Ex
- 2B9 = 111 + 115



Gauge type

- G = Low profile integrated gauge bar/PSI
- J = Low profile integrated gauge bar/PSI with pressure range indicators
- Q = Round gauge bar/PSI
- 0 = No gauge port
- P = Port Plate Rc 1/8

