

Dvojitá vsuvka

- Vnější závit

- M5 G 1/8 G 1/4 G 3/8 G 1/2 G 3/4 G 1

- Vnější závit

- M5 G 1/8 G 1/4 G 3/8 G 1/2 G 3/4 G 1

- FPT-S-RDO



Provozní tlak min/max
Teplota okolí min./max.

0 ... 16 bar
-20 ... 80 °C

Technické údaje


Číslo materiálu	Přípoj G	Přípoj D	Dodací měrná jednotka
1823391081	M5	M5	10 Ks
1823391100	G 1/8	M5	10 Ks
1823391015	G 1/8	G 1/8	10 Ks
1823391016	G 1/4	G 1/8	10 Ks
1823391017	G 1/4	G 1/4	10 Ks
1823391018	G 3/8	G 1/4	10 Ks
1823391019	G 3/8	G 3/8	10 Ks
1823391020	G 1/2	G 3/8	5 Ks
1823391029	G 1/2	G 1/2	5 Ks
1823391286	G 3/4	G 1/2	2 Ks
1823391287	G 3/4	G 3/4	2 Ks
1823391288	G 1	G 3/4	2 Ks
1823391289	G 1	G 1	2 Ks

Technické informace

Materiál	
Materiál	Mosaz, poniklovaný
Těsnění	Polyvinylchlorid, tvrdý

Rozmry

Rozmry

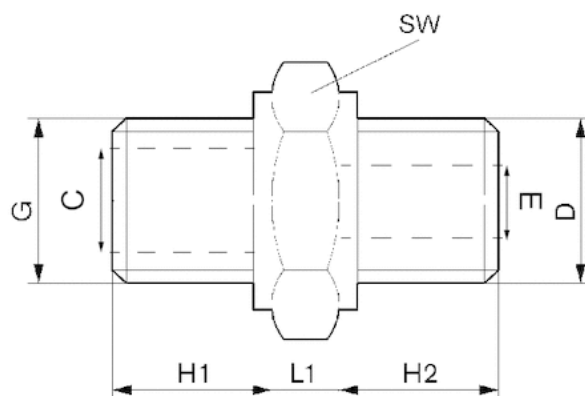

Rozmry

Číslo materiálu	Přípoj D	Přípoj G	ØC	ØE	H1	H2	L1	SW
1823391081	M5	M5	-	2	4.5	4.5	4	8
1823391100	M5	G 1/8	-	-	7	5	5	13
1823391015	G 1/8	G 1/8	8	5	7.5	7.5	4	14
1823391016	G 1/8	G 1/4	8	5	10	7	5	17
1823391017	G 1/4	G 1/4	8	7.5	10	10	5	17
1823391018	G 1/4	G 3/8	12	7.5	10	10	5	22
1823391019	G 3/8	G 3/8	12	10	10	10	5	22
1823391020	G 3/8	G 1/2	15	10	12	10	6	27

Číslo materiálu	Přípoj D	Přípoj G	ØC	ØE	H1	H2	L1	SW
1823391029	G 1/2	G 1/2	15	13	12	12	6	27
1823391286	G 1/2	G 3/4	20	13	12	12	7	32
1823391287	G 3/4	G 3/4	20	18	12	12	7	32
1823391288	G 3/4	G 1	25	18	15	12	8	41
1823391289	G 1	G 1	25	22	15	15	8	41

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2022 Emerson Electric Co. All rights reserved.
2022-04



CONSIDER IT SOLVED™